
La Boit Inc.

40' Medical Clinic
Distance Nursing Mobile Simulation Unit
University of South Dakota

2011 Ford F-53 Class A 2wd gas chassis

2 - 7.0K Onan gas generators

Drawn	6-29-2011
rev.	7-11-2011
rev.	7-13-2011

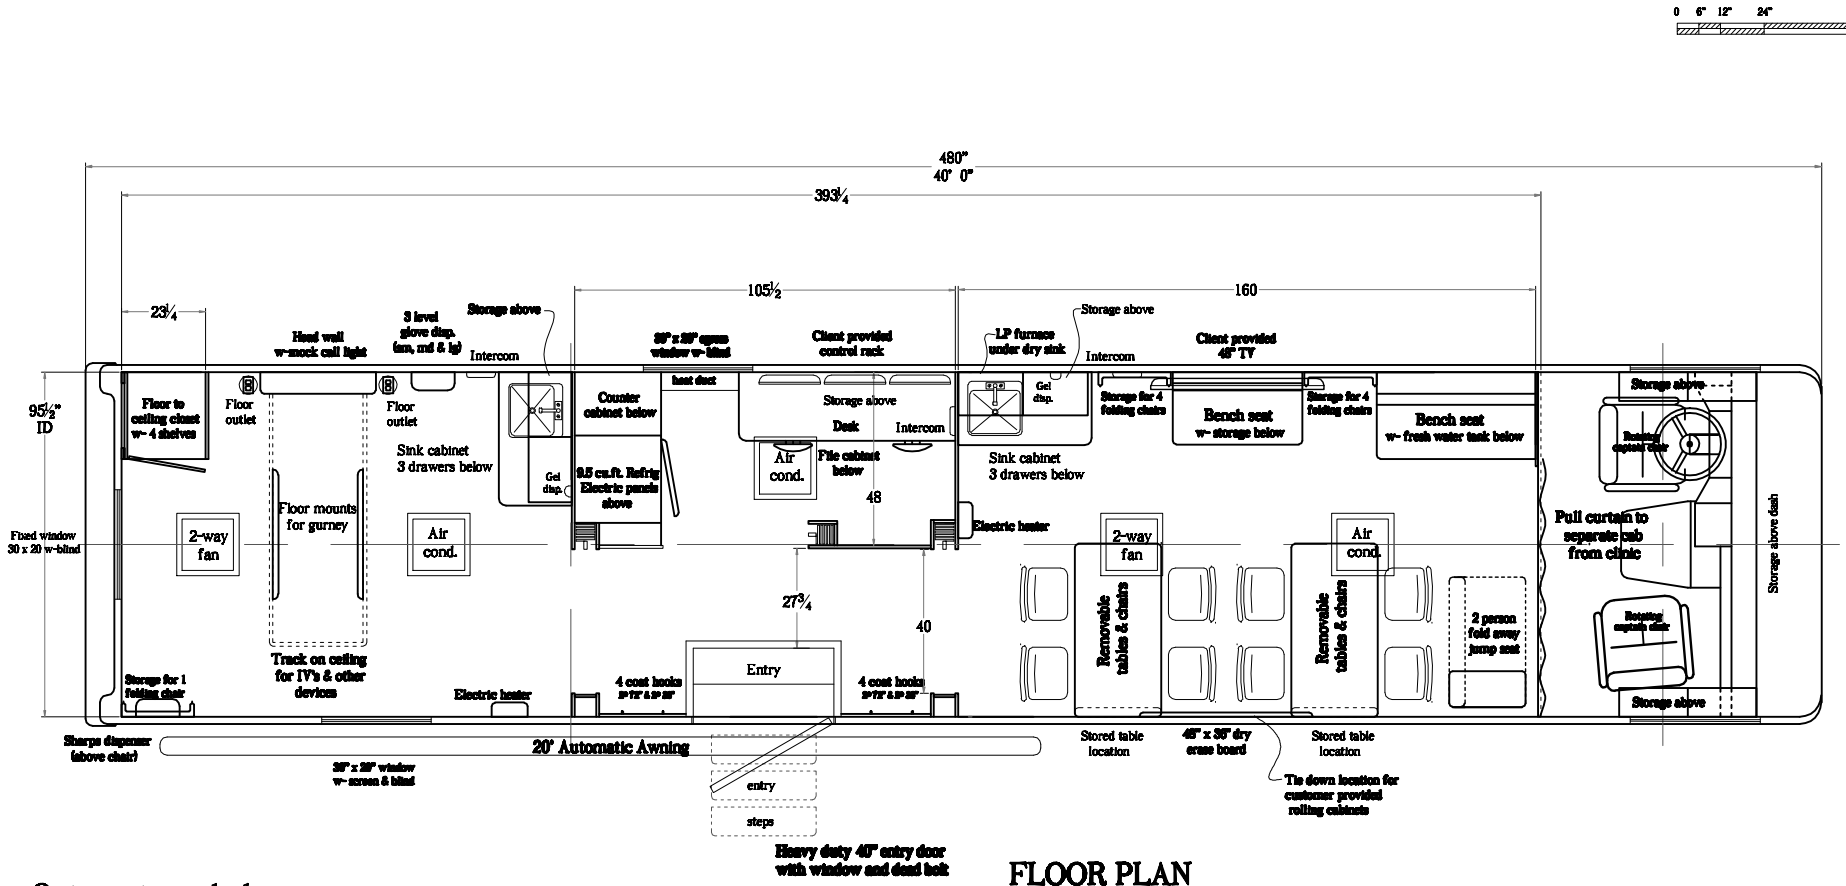

FLOOR PLAN

Options to include-

- 2 - 7.0K Onan gas generators
- Winter package w- 8D battery
- 40" Entry door
- Rear view back up camera -Zone Defense
- 20' Automatic side awning (color TBD)
- Leveling -stabilizing system -Quadra Bigfoot
- Exterior entry light
- 4 heavy duty coat hooks on each side of entry door
- Minimum 20 duplex outlets (location TBD)
- 2 - Floor outlets (location TBD)
- Egress window in control room
- Coffee maker (location TBD)
- Floor mounts for Gurney in Patient room
- Built in connect for client provided cabinets(loc.TBD)
- Dividers for wall cabinets
- Delivery to USD Vermillion, South Dakota
- 3 - Air conditioners
- 2 - Electric heaters
- LP gas heater 30,000 BTU w-tank
- 2- 2 way fans
- Freedman double fold away jump seat
- 2"Acoustical foam ceiling (to absorb noise)
- Interior lighting each room separate w- dimmer switch
- Unit to be prewired for Video cameras & monitors
- 9.5 cu.ft. Refrigerator
- Built in Intercom system
- Patient call light (from -to TBD)
- Mock Oxygen valve & vacuum (location TBD)
- Overhead track system around Gurney location for IV's etc.
- Wall mounted dispensers for gloves, masks, gowns, & hand gel
- Head wall w- mock controls
- Wall mounted sharps container
- Manual blood pressure cuff

Floor color-
Counter color-
Blind color-
Seat color-

Approval signature _____

Fax® 614-231-7660
www.laboit.com